


# 4452 STEPLIGHT

## Fluorescent & Incandescent Recessed

CATALOG NUMBER	
NOTES	
TYPE	

### Specifications

L:	10 - 1/4" 260 mm
W:	4 - 7/16" 124 mm
H:	5 - 1/4" 134 mm

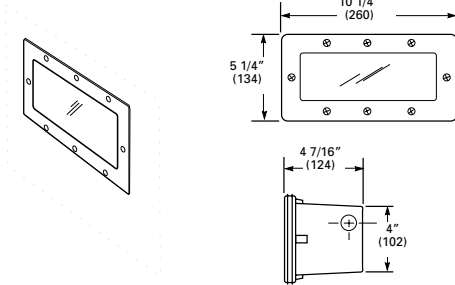

IP66

### DESCRIPTION

Hydrel's 4452 recessed step light is a rugged fixture designed for concrete, block, or brick applications. These heavy wall cast aluminum or bronze lights are completely weatherproof; sealed with silicone gasket, tempered lens, and stainless steel fasteners.

### ORDERING INFORMATION

EXAMPLE: 4452 A 13DTT 120 LLV LPI BZ

4452	A	13DTT			120
Model	Material	Lamp Type			Voltage
4452	A Aluminum	INCANDESCENT <sup>1</sup>	FLUORESCENT		LOW VOLTAGE <sup>4</sup>
	B Bronze		25I A19 25 watt Med.	7TT 2G7 4 PIN	2/M50 <sup>6</sup> MR-16, GX5.3 base
			9TT 2G7 4 PIN		120
			13DTT G24Q-1 4 PIN		277
			2/7TT (2)2G7 4 PIN		347
			2/9DTT (2)2G7 4 PIN		
			2/13DTT (2)G24Q-1 4 PIN		

	LLV	LPI	BZ
Distribution <sup>5</sup>	Accessories	Lamp	Finish <sup>3</sup>
NSP Narrow Spot	<b>External</b>	LPI Lamp Included	BL Black
SP Spot	LLV <sup>2</sup> Louver Door		BZ Bronze
FL Flood			DDB Dark Bronze
NFL Narrow Flood			DNA Natural Aluminum
WFL Wide Flood			GN Green
			GR Gray
			SND Sand
			STG Steel Gray
			TVG Terra Verde Green
			WH White
			CF Custom
			__Z <sup>7</sup> Zinc Undercoat (i.e. BLZ)

### FEATURES & SPECIFICATIONS

- MATERIAL:** Cast aluminum or cast bronze.
- LAMP:** Incandescent: 40 Watt Max., A19 lamp  
Fluorescent: 13 Watt Max., CFL Twin Tube or Double Twin Tube.
- SOCKET:** Incandescent: Medium screw base  
Fluorescent: 4-Pin base
- BALLAST:** Fluorescent: Electronic ballast high frequency with -18°C (0°F) minimum starting temperature.
- VOLTAGE:** See ordering guide for options.
- REFLECTOR:** Flat polished stainless steel.
- LENS:** Diffused, tempered glass for non-louvered door. Clear, tempered glass for louvered door.
- CONDUIT ENTRIES:** 3/4" NPT side entries standard.
- ACCESSORIES:** LLV - Louver door, 45° cut-off.
- FINISH:** Super durable Polyester TGIC powder coat finish (standard). Optional Zinc undercoat for harsh environments.
- FASTENERS:** Stainless steel.
- LISTING:** U.L., CSA

- Notes:
- 1 Incandescent models available in 120 Volt only.
  - 2 LLV Louver Door available with clear lens only.
  - 3 Finish is natural aluminum or bronze unless finish specified.
  - 4 12 Volt only (Transformer not included)
  - 5 Only valid if 2/M50 and LPI chosen.
  - 6 Only valid with these distributions: NSP, SP, FL, NFL, WFL.
  - 7 Add Zinc undercoat for harsh environments.

NOTE: Hydrel Reserves The Right To Modify Specification Without Notice. Any dimension on this sheet is to be assumed as a reference dimension: "Used for information purposes only. It does not govern manufacturing or inspection requirements." (ANSI Y14.5-1973)



9144 Deering Avenue, Second Floor • Chatsworth, CA 91311  
Phone: 888-834-5684 • www.hydrel.com

©2014-2018 Acuity Brands Lighting, Inc.  
2/21/18  
4452