

# T1906 LOW VOLTAGE TRANSFORMER

500 WATT 240 or 120 to 24 or 12  
50/60HZ AC Voltage only

## DESCRIPTION

These 120/240 to 12/24 Volt stepdown transformers are two winding isolated type. Taps are provided to insure proper voltage when operated within allowable line loss limits. Two separate wiring compartments isolate primary and secondary leads. Housed in weatherproof enclosure. Meets requirements of article 680 N.E.C. Listed by U.L.

## FEATURES & SPECIFICATIONS

**CONSTRUCTION:** Heavy gauge steel Nema IV enclosure.

**TRANSFORMER:** 120/240 Volt primary circuit breaker.

Secondary 12 or 24 Volt.

**INPUT WATTAGE:** 120 or 240 Volts

**WATTAGE:** 500

**TAPS (Output Voltage):** 12 or 24 Volt


**WARRANTY:** 1-year limited warranty. Complete warranty terms located at:  
[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

Consult factory for details


**NOTE:** Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

### Units Rated 120 x 240 V Input: 12 x 24 V Output

INPUT	OUTPUT	CONNECTION DIAGRAM
120	12	K
120	24	L
240	12	M
240	24	N

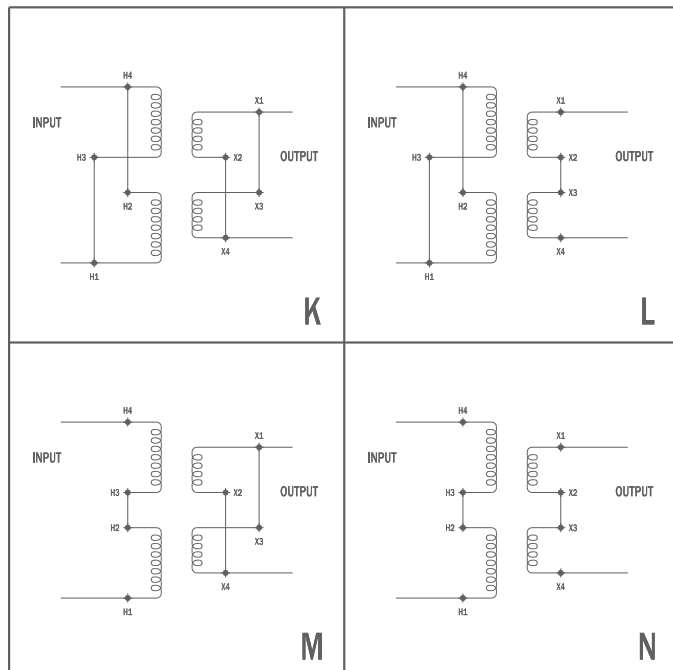

TYPE	
JOB NAME	
PART NUMBER	

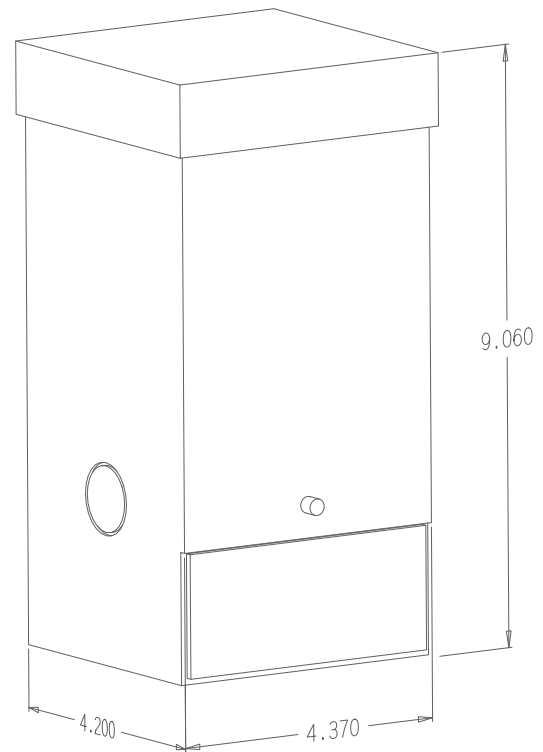

### Specifications

H: 9.06"

W: 4.37"

L: 4.2"

Weight: 15 lbs.

APPROVALS	
-----------	--



9144 Deering Ave. Second Floor • Chatsworth, CA 91311  
Phone: 866.533.9901 • [www.hydrel.com](http://www.hydrel.com)

©2014-2017 Acuity Brands Lighting, Inc.  
Rev. 07/12/17  
T1906