




4740 SERIES

Compact Fluorescent

Specifications

L:	12" 305 mm
W:	4" 102 mm
H:	4 - 7/16" 113 mm

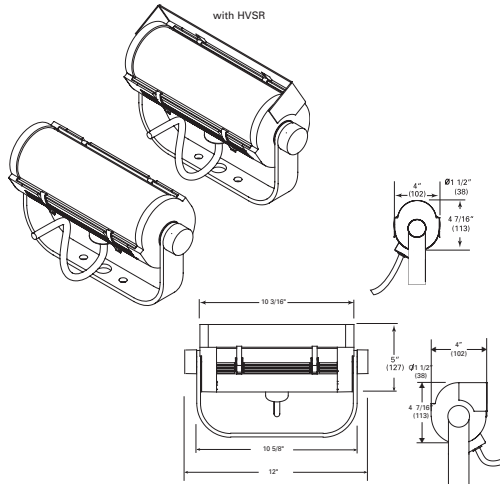

CATALOG NUMBER	
NOTES	
TYPE	

DESCRIPTION

Hydrel's 4740 Compact Fluorescent lighting fixture brings fluorescent lamp performance to smaller outdoors applications. These are ideal for soft, even illumination within smaller planters, and along walls, and signs.

ORDERING INFORMATION

EXAMPLE: 4740 32TRT MVOLT WFL YM ARJB FVSR CSL30 LPI DDB

4740	32TRT	MVOLT	WFL	YM	ARJB
Model*	Lamp type*	Voltage*	Distribution*	Mounting*	Mounting Options
4740	Fluorescent 26TRT GX24Q-3 32TRT GX24Q-3	MVOLT	WFL Wide Flood	YM Yoke Mount	ARJB Alum. J-Box WMP Wall Mount Plate WMSA Wall Mount with Splice Access EWM_ Ext. Wall Mount PSSA Pedestal Stanchion Mt PMSA Pole Mount Splice Access SMSA_ 12"-48" Stanchion Mt, available in 6" increments. FJB Flush J-Box PSS_ 18", 24" or 36" Polymer Sealed Ground Spike
FVSR	CSL30	LPI	DDB		
Accessories	Cord Set Length*	Lamp	Finish*	Listing	
External	CSL_ 10"-50" of cord, available in 5' increments	LPI Lamp Included	BL Black BZ Bronze DDB Dark Bronze DNA Natural Aluminum GN Green GR Gray	SND Sand STG Steel Gray TVG Terra Verde Green WH White CF Custom _Z⁵ Zinc Undercoat (i.e. BLZ)	IEC International Electo-Technical Commission (for use with 50HZ applications only)

*Required Entries

NOTE: Hydrel Reserves The Right To Modify Specification Without Notice. Any dimension on this sheet is to be assumed as a reference dimension: "Used for information purposes only. It does not govern manufacturing or inspection requirements." (ANSI Y14.5-1973)



FEATURES & SPECIFICATIONS

MATERIAL: Extruded aluminum with die cast aluminum end caps.

LAMP: One (1) Compact Fluorescent, 32 Watt Max. For 42 Watts please consult factory.

SOCKET: GX24Q 4 pin

VOLTAGE: See ordering guide.

DISTRIBUTION: WFL - Wide Flood

LENS: Polycarbonate.

MOUNTING: YM: Yoke Mount

BALLAST: Electronic multi-volt, 0°F(-18°C) minimum starting temperature.

CORD: Supplied with a minimum of 10' of 18-3 cable. Cord length must be specified.

ACCESSORIES: HVSR, full visor optional.

FINISH: Super durable Polyester TGIC powder coat finish (standard). Optional Zinc undercoat for harsh environments.

FASTENERS: Stainless Steel.

LISTING: U.L., C.U.L.

